

Technical Specification:

Patio Door System

Adapting to a changing environment"

A patio door system to enhance the suite of residential systems, with minimal sightlines to maximise views to the outdoors and natural light into the home.

A thermally efficient, security tested door system giving you peace of mind that the home is safe and secure.

Designed to be a statement of style and quality each door type has been designed to meet the needs of the modern home.



Design Options:


- Double Track Sliding Door
- Double Track Lift & Slide
- Triple Track Lift & Slide
- Single & Dual Colour Powder Coated
- Double & Triple Glazed

Design Features & Benefits


- 106mm Interlock
- 111mm Outer Jamb
- 33mm Low Threshold
- Soft Brake Close option
- High security 8 point lock as standard**

Design Standards

- BS EN 4873
- BS EN 14351-1
- BS EN 6375-1
- BS EN12020-2
- BS EN 10077-2

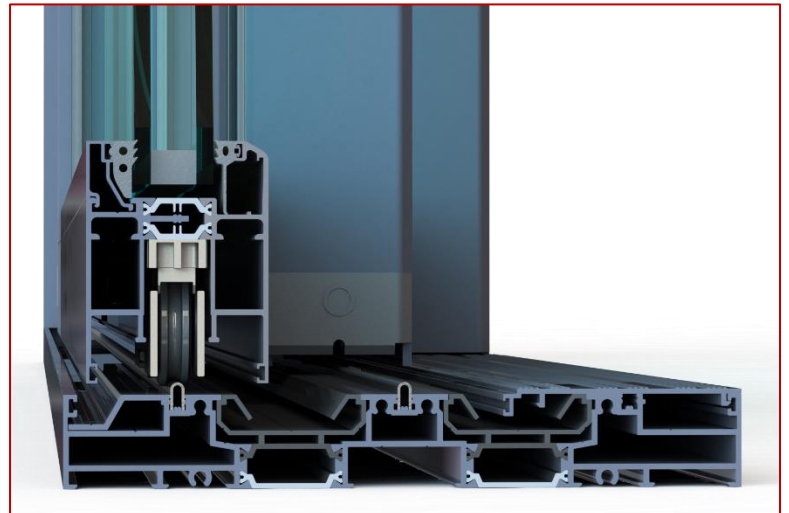

	Inline Sliding **	Lift & Slide *
Maximum Height	2300mm	2500mm
Maximum Width	2000mm	2100mm
Jointing	Mechanical	Mechanical
Internally Beaded	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Glazing Thickness	28-42mm	28-42mm



KESTREL
ALUMINIUM SYSTEMS

*based on an IGU centre pane 1.1W/m2K

nt and reserves the right to alter any of the specifications in this document without prior notice.

Kestrel Aluminium Systems Ltd

Website: www.kestrelaluminium.co.uk

Email: info@kestrelaluminium.co.uk

180 Rupert Street, Aston, Birmingham, B7 5DT

Tel: 0121 333 3575

Fax: 0121 333 5335